



## 11350 / 11550 / 11800 Radiussed forend extension

### Radiussed forend extension with additional lock for MINT locks

#### Product profile

The round forend extension can be fitted to any MINT lock. The lock can be prepared for fitting the faceplate extension in just a few simple steps using the enclosed installation set.

#### Standard version

- Product number 11350: Distance between the locking points is 350 mm
- Product number 11550: Distance between the locking points is 550 mm
- Product number 11800: Distance between the locking points is 800 mm
- Ordering information: For locks with a distance of 88 mm, the correspondingly labelled faceplate length must be selected.

#### Standards

Tested and approved according to EN 179 and EN 1125 in conjunction with the MINT multipoint locks.



#### 11350 · 1 · 2 · 3

1 Forend	2 Surface	3 Options
50 18r x 3 x 578.5 mm	00 Stainless steel matt	0000 No options
51 20r x 3 x 578.5 mm	99 On request	
52 20r x 3 x 600.5 mm*		

#### 11550 · 1 · 2 · 3

1 Forend	2 Surface	3 Options
53 18r x 3 x 778.5 mm	00 Stainless steel matt	0000 No options
54 20r x 3 x 778.5 mm	99 On request	
55 20r x 3 x 800.5 mm*		


#### 11800 · 1 · 2 · 3

1 Forend	2 Surface	3 Options
56 18r x 3 x 1028.5 mm	00 Stainless steel matt	0000 No options
57 20r x 3 x 1028.5 mm	99 On request	
58 20r x 3 x 1050.5 mm*		

\*for Centre 88 mm

## 11350 / 11550 / 11800 Radiussed forend extension

Radiussed forend extension with additional lock for MINT locks

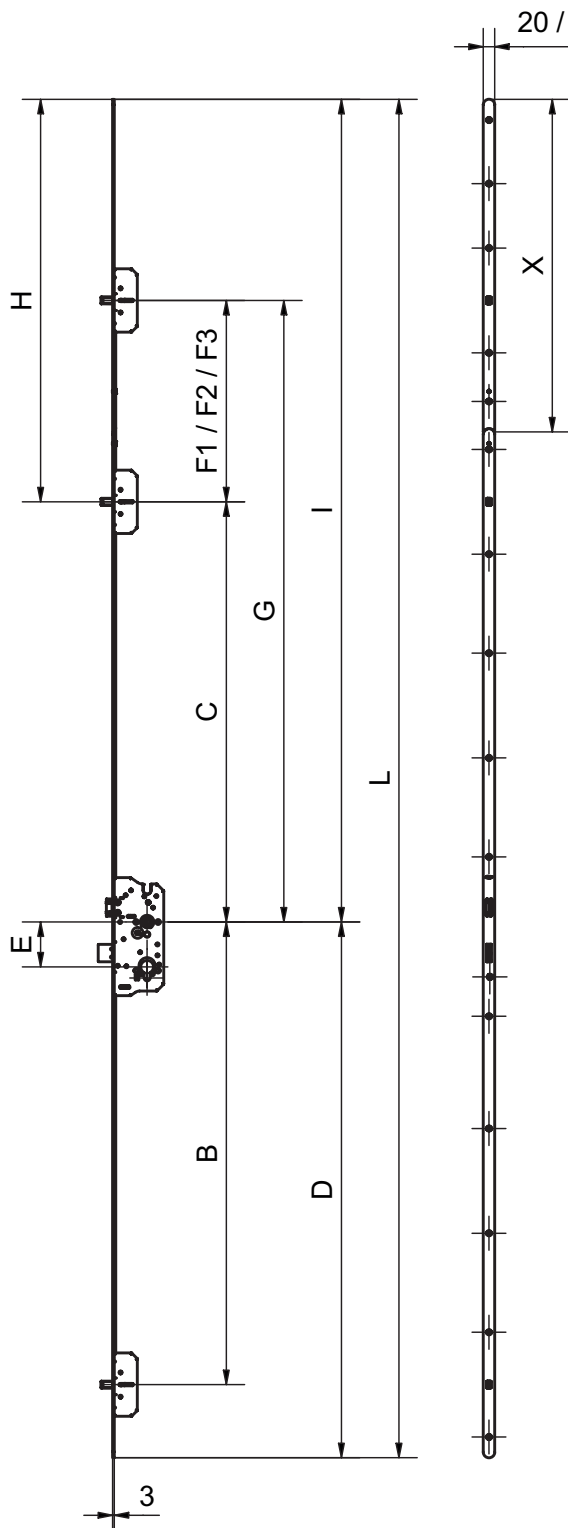

E	B	C	D
72	740	750	867
78	804	730	931
88	875	765	980
92	760	730	887

F1 = 350 (11350)					
E	G	H	I	L	X
72	1100	700	1450	2317	578.5
78	1080	700	1430	2361	578.5
88	1115	700	1465	2445	600.5
92	1080	700	1430	2317	578.5

F2 = 550 (11550)					
E	G	H	I	L	X
72	1300	900	1650	2517	778.5
78	1280	900	1630	2561	778.5
88	1315	900	1665	2645	800.5
92	1280	900	1630	2517	778.5

F3 = 800 (11800)					
E	G	H	I	L	X
72	1550	1150	1900	2767	1028.5
78	1530	1150	1880	2811	1028.5
88	1565	1150	1915	2895	1050.5
92	1530	1150	1880	2767	1028.5