

TE 640 3D BW/16

for unrebated heavy-duty doors with claddings up to 16 mm on both sides



Technical data

Property	Value
Load capacity	120.0 kg
Min. door thickness	40.0 mm

Notes

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter [technical information](#).


The cladding material where the hinge will be installed, must be removed in order for the bracket to be installed.

Combinations


TE 640 3D

Item versions

Finish	blue galvanized (SW 010)
--------	--------------------------




front view

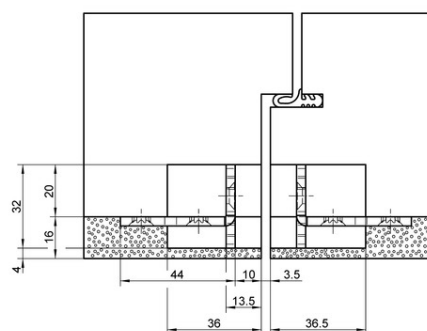


cross section 1

TECTUS - TE 640 3D BW/16

VPE	Pack of 10
DIN	DIN right and left hand
ITEM NO.	5 401681 0 01006
ITEM NO. (SAP)	500004137
EAN	4015471130640

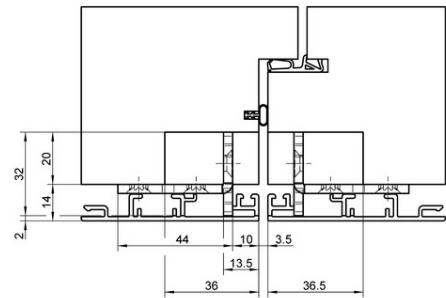

cross section 2

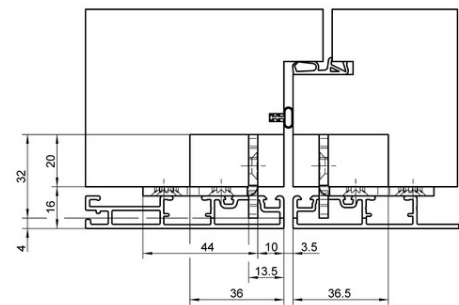

cross section 3